

SPECIAL FEATURES



TOUCH PAD

Extremely convenient and easy-to-use: Electronic control module for the power backgauge with multilingual touch pad. 99 programs with up to 99 steps can be stored. Also useful: the pre-programmed DIN sizes and the automatic memory for repeat cuts.




EASY-CUT: NEW BLADE ACTIVATING BARS

Blade and clamp can be activated independently via the two-step blade activating bars with separate trigger points for blade and clamp. The electronically controlled true two-hand operation provides maximum operator safety.



IR LIGHT BEAM SAFETY CURTAIN

Efficient and safe cutting and trimming is guaranteed by the IR light beam safety curtain on the front table. Additional safety is provided by the transparent safety cover on the rear table.

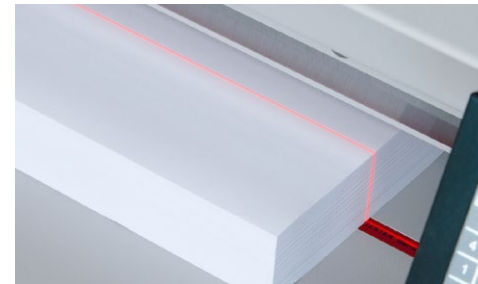


OPTICAL CUTTING LINE

The optical cutting line with bright, durable LEDs shows where the cut will be performed and helps to align cutting marks precisely for accurate cuts.



ELECTRONIC HAND WHEEL

Electronic hand wheel for manual backgauge positioning with infinitely variable speed control (from very slow to very fast).

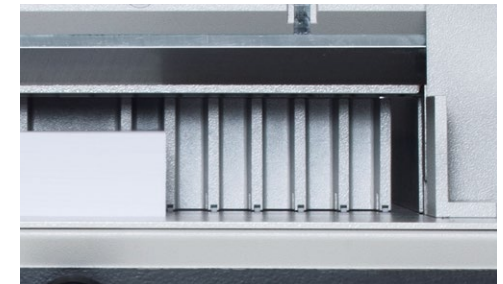

PRECISE POSITIONING

Two side lays each on front and rear tables and the precise backgauge allow exact positioning even for small paper stock.



HOOK-IN TOOL HOLDER

The practical hook-in tool holder is placed on the back table and keeps all necessary tools for blade change and service jobs within reach.

RANGE OF GUILLOTINES 2014



Model	MANUAL			ELECTRIC				ELECTRIC				HYDRAULIC	
	4300	4305	4705	4315	4350	4815	4850	4860	5255	6655	6660	5560	7260
Cutting length, mm	430	430	475	430	430	475	475	475	520	650	650	550	720
Cutting height, mm	20	40	70	40	40	80	80	80	80	80	80	95/92*	80/78*
Narrow cut, mm	36	34	30	35	35	30	30	35	35	25	25	32/60*	20/90*
Table depth, mm	340	435	455	435	435	458	458	450	520	610	610	570	720
Manual cut	•	•	•										
Manual clamp	•	•	•	•		•							
Manual back gauge	•	•	•	•	•	•	•						
Power back gauge								•	•	•	•	•	•
Safety guard	•	•	•	•	•	•	•		•	•			
IR safety curtain								•			•	•	•
Easy-Cut system				•	•	•	•	•	•	•	•	•	•
Electro-mechanical cut				•	•	•	•	•	•	•	•		•
Electro-mechanical clamp					•		•	•	•	•	•		
Hydraulic clamp												•	•
Hydraulic cut												•	
Touch pad programming								•	•	•	•	•	
Electronic control module													•
Airtable												optional	•
Drop-in tool holder						•	•	•	•	•	•	•	•

* with false clamp plate

Technical data approximate. Subject to change. 10/2013



P 1800 422 349 W www.neopost.com.au